


Mechanical Specifications

D	31.0mm Max
T	6.0mm Max
Lead Diameter	1.0±0.1mm
S	9.5±1.0mm
L	38.0±9.0 mm
B	7.5±1.0mm
C	3.50±1.0mm

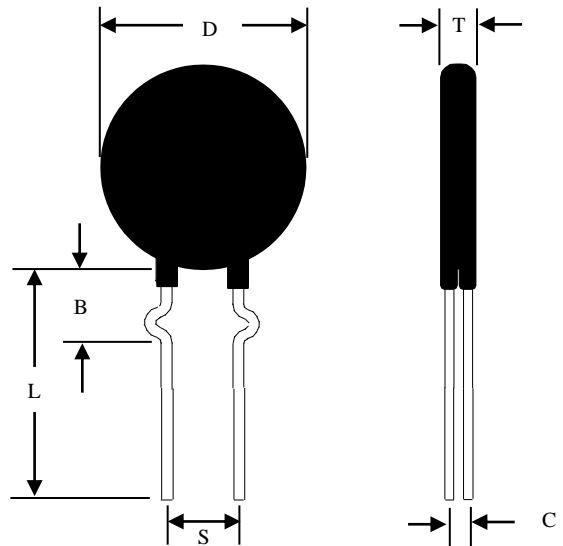

Electrical Specifications

Resistance @ 25°C	10.0Ω ± 20%
Max Steady State Current Up to 65°C	15.0 A
Max recommended energy rating (Joules)	150.0 J
Actual failure point of instantaneous energy (Joules)	220.0J
Max Capacitance @ 120 VAC	10,419μF
Max Capacitance @ 240 VAC	2,604μF
Resistance @ 100% of Max Current	0.050 Ω
Resistance @ 50% of Max Current	0.110 Ω
Body Temperature @ 100% Current rating	228°C
Dissipation Constant	45.4mW/°C
Thermal Time Constant	232 seconds
Material Type	"I"

Rev.	Date:	Change
1	4/15/18	Issue

**Ametherm, Inc**  
961 Fairview Drive  
Carson City, NV 89701  
Telephone: **800-808-2434**  
Fax: 775 884-0670  
[www.Ametherm.com](http://www.Ametherm.com)

**Reliability Delivered On Time**