


OV2686 2MP product brief



Cost-Effective, Low-Power 2-Megapixel Sensors for Feature Phones, Smartphones and Tablets

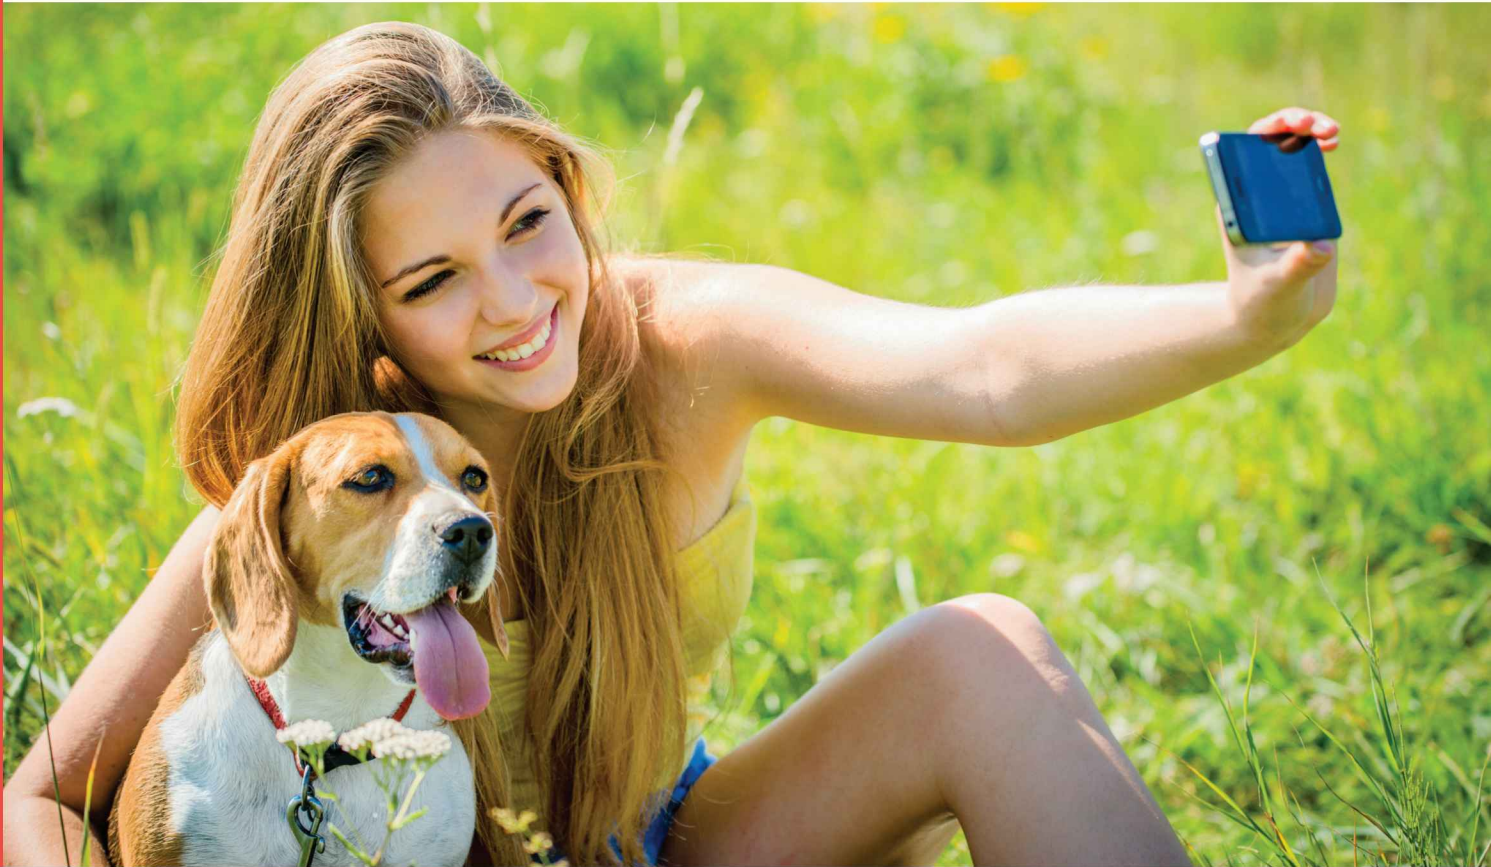

available in
a lead-free
package

The OV2686 (SoC) is a low-power 2-megapixel CameraChip™ sensor for feature phones and front-facing camera applications in smartphones and tablets. The 1/5-inch sensor leverages a 1.75-micron OmniPixel3-HS™ pixel to deliver high quality 2-megapixel images and video at 15 frames per second (fps). The sensor's high sensitivity and low dark current deliver exceptional image and video quality, even in low-light conditions.

The OV2686 is a cost-effective sensor with a smaller footprint and smaller die size. Compared to previous generations, the OV2686 offers improved image quality with the latest OmniPixel3-HS pixel architecture. Using OmniVision's proprietary sensor technology, the sensor reduces or eliminates common lighting and electrical sources of image contamination, such as fixed pattern noise, smearing, etc., to produce a clean, stable, color image.

Find out more at www.ovt.com.




Applications

- Cellular and Picture Phones
- Home Entertainment
- PC Multimedia
- Toys

Product Features

- 1.75 μm x 1.75 μm pixel with OmniPixel3-HS™ technology
- ZMP at 15 fps
- optical size of 1/5"
- supports images sizes:
 - UXGA (1600x1200)
 - HD+ (1600x900)
 - SXGA (1280x960)
 - 720p (1280x720), and more
- support for output formats: 10-bit RGB RAW, 8-bit YUV
- programmable controls for frame rate, mirror and flip, cropping, and windowing
- two-wire serial bus control (SCCB)
- 28.5° CRA
- digital video port (DVP) parallel output interface
- automatic image control functions:
 - automatic exposure control (AEC)
 - automatic gain control (AGC)
 - auto white balance (AWB)
- on-chip phase lock loops (PLLs)
- image quality control:
 - defect pixel correction (DPC)
 - denoise
 - lens shading

OV2686




Ordering Information

- OV02686-H38A**
(color, lead-free, 38-pin CSP5)

Product Specifications

- active array size:** 1616 x 1216
- power supply:**
 - core: 1.8V
 - analog: 2.8V
 - I/O: 1.8V/2.8V
- power requirements:**
 - active: 137 mW
 - XSHUTDN: <1 μA
- temperature range:**
 - operating: -30°C to +85°C junction temperature
 - stable image: 0°C to +50°C junction temperature
- output interfaces:** 10-bit DVP parallel output
- output formats:** 10-bit RGB RAW, 8-bit YUV422
- lens size:** 1/5"
- lens chief ray angle:** 28.5° non-linear
- input clock frequency:** 6 - 27 MHz
- maximum image transfer rate:** 15 fps
- scan mode:** progressive
- pixel size:** 1.75 μm x 1.75 μm
- image area:** 2840 μm x 2150 μm
- package/die dimensions:**
 - CSP5: 4254 μm x 3984 μm

Functional Block Diagram

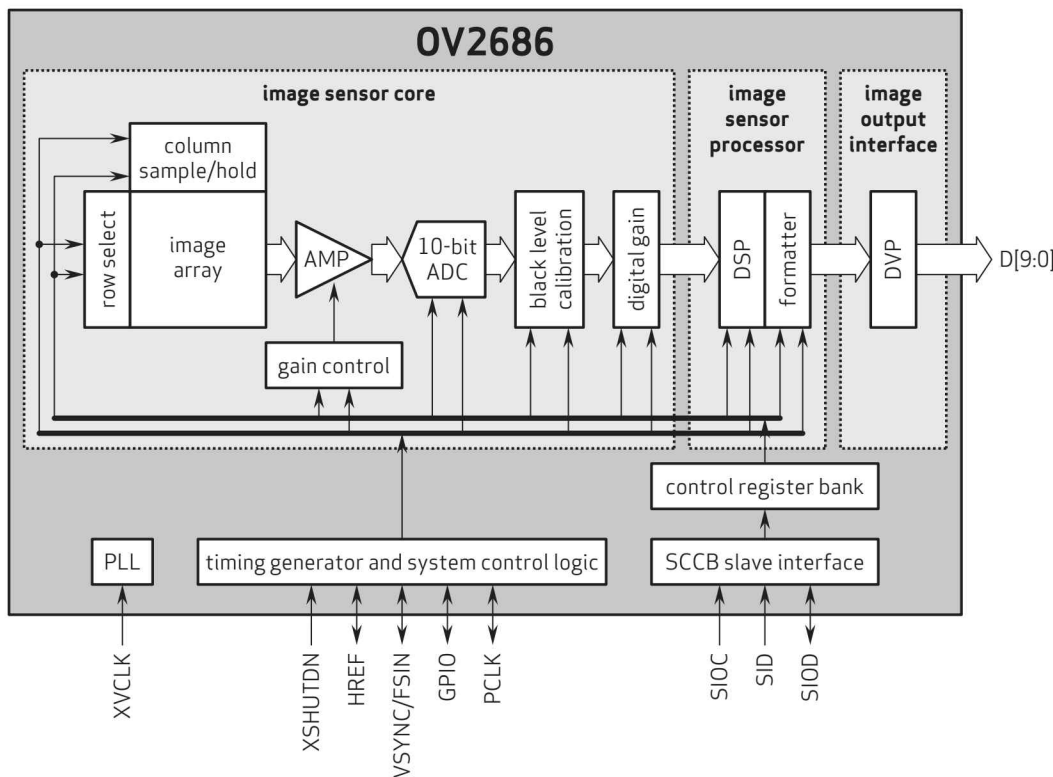

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: +1 408 567 3000
Fax: +1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo, VarioPixel and OmniPixel are registered trademarks of OmniVision Technologies, Inc. OmniBSI are trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision