

FEATURES


- **Controlled Baseline**
 - One Assembly/Test Site, One Fabrication Site
- **Extended Temperature Performance of –55°C to 125°C**
- **Enhanced Diminishing Manufacturing Sources (DMS) Support**
- **Enhanced Product-Change Notification**
- **Qualification Pedigree ⁽¹⁾**
- **Single-Supply Operation**
- **Rail-to-Rail Output (Within 3 mV)**
- **Micro Power: $I_Q = 23 \mu\text{A}/\text{Amplifier}$**

(1) Component qualification in accordance with JEDEC and industry standards to ensure reliable operation over an extended temperature range. This includes, but is not limited to, Highly Accelerated Stress Test (HAST) or biased 85/85, temperature cycle, autoclave or unbiased HAST, electromigration, bond intermetallic life, and mold compound life. Such qualification testing should not be viewed as justifying use of this component beyond specified performance and environmental limits.

- **Micro-Size Packages**
- **Low Offset Voltage: 500 μV Typical**
- **Specified From $V_S = 2.3 \text{ V}$ to 5.5 V**

APPLICATIONS

- **Battery-Powered Instruments**
- **Portable Devices**
- **High-Impedance Applications**
- **Photodiode Preamplifiers**
- **Precision Integrators**
- **Medical Instruments**
- **Test Equipment**

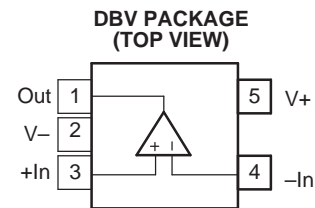

DESCRIPTION/ORDERING INFORMATION

The OPA336 micro-power CMOS operational amplifier (MicroAmplifier™ series) is designed for battery-powered applications. The device operates on a single supply, with operation as low as 2.1 V. The output is rail to rail and swings to within 3 mV of the supplies with a 100-k Ω load. The common-mode range extends to the negative supply — ideal for single-supply applications.

In addition to small size and low quiescent current (23 $\mu\text{A}/\text{amplifier}$), the OPA336 features low offset voltage (500 μV typical), low input bias current (1 pA), and high open-loop gain (115 dB).

The device is packaged in the tiny DBV (SOT23-5) surface-mount package. It operates from –55°C to 125°C. A macromodel is available for download (at www.ti.com) for design analysis.

ORDERING INFORMATION

T_A	PACKAGE	ORDERABLE PART NUMBER	TOP-SIDE MARKING
–55°C to 125°C	DBV – SOT23-5	OPA336MDBVREP	OAYM



ELECTROSTATIC DISCHARGE SENSITIVITY

This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

MicroAmplifier is a trademark of Texas Instruments.

OPA336-EP
SINGLE-SUPPLY MICRO-POWER CMOS OPERATIONAL AMPLIFIER
MicroAmplifier™ SERIES

SCES658–JUNE 2006

Absolute Maximum Ratings⁽¹⁾

		MIN	MAX	UNIT
Supply voltage			7.5	V
Signal input terminals	Voltage range ⁽²⁾	(V–) – 0.3	(V+) + 0.3	V
	Current ⁽²⁾		10	mA
Output short circuit ⁽³⁾			Continuous	
T _A	Operating free-air temperature range	–55	125	°C
T _{stg}	Storage temperature range	–55	125	°C
T _J	Junction temperature		150	°C
Lead temperature (soldering, 10 s)			300	°C
ESD rating	Charged-Device Model (CDM)		1000	
	Human-Body Model (HBM)		500	V
	Machine Model (MM)		100	
θ _{JA}	Package thermal impedance		200	°C/W

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Input terminals are diode clamped to the power-supply rails. Input signals that can swing more than 0.3 V beyond the supply rails should be current limited to 10 mA or less.
- (3) Short circuit to ground, one amplifier per package

Electrical Characteristics

over recommended operating temperature range, $V_S = 2.3\text{ V to }5.5\text{ V}$, $T_A = 25^\circ\text{C}$, $V_S = 5\text{ V}$, $R_L = 25\text{ k}\Omega$ connected to $V_S/2$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Offset Voltage						
V_{OS}	Input offset voltage				± 500	μV
	Input offset voltage overtemperature ⁽¹⁾				± 950	
PSRR	Input offset voltage vs power supply	$V_S = 2.3\text{ V to }5.5\text{ V}$		25	100	$\mu\text{V/V}$
	Overtemperature ⁽¹⁾				150	
	Channel separation, dc			0.1		
Input Bias Current						
I_B	Input bias current			± 1	± 10	pA
	Overtemperature ⁽¹⁾				± 200	
I_{OS}	Input offset current			± 1	± 60	pA
Noise						
	Input voltage noise	$f = 0.1\text{ Hz to }10\text{ Hz}$		3		$\mu\text{Vp-p}$
e_n	Input voltage noise density	$f = 1\text{ kHz}$		40		$\text{nV}/\sqrt{\text{Hz}}$
i_n	Current noise density	$f = 1\text{ kHz}$		30		$\text{fA}/\sqrt{\text{Hz}}$
Input Voltage Range						
V_{CM}	Common-mode voltage range		-0.2		$(V+) - 1$	V
CMRR	Common-mode rejection ratio	$-0.2\text{ V} < V_{CM} < (V+) - 1\text{ V}$	76	86		dB
	Overtemperature ⁽¹⁾		72			
Input Impedance						
	Differential input impedance			$10^{13} \parallel 2$		$\Omega \parallel \text{pF}$
	Common mode input impedance			$10^{13} \parallel 4$		$\Omega \parallel \text{pF}$
Open-Loop Gain						
A_{OL}	Open-loop voltage gain	$R_L = 25\text{ k}\Omega$, $100\text{ mV} < V_O < (V+) - 100\text{ mV}$	90			dB
		$R_L = 5\text{ k}\Omega$, $500\text{ mV} < V_O < (V+) - 500\text{ mV}$	90			
	Overtemperature ⁽¹⁾	$R_L = 25\text{ k}\Omega$, $100\text{ mV} < V_O < (V+) - 100\text{ mV}$	82			
		$R_L = 5\text{ k}\Omega$, $500\text{ mV} < V_O < (V+) - 500\text{ mV}$	89			
Frequency Response						
GBW	Gain-bandwidth product	$V_S = 5\text{ V}$, $G = 1$		100		kHz
SR	Slew rate	$V_S = 5\text{ V}$, $G = 1$		0.03		$\text{V}/\mu\text{s}$
	Overload recovery time	$V_{IN} \times G = V_S$		100		μs

(1) Limits apply over the specified temperature range, $T_A = -55^\circ\text{C to }125^\circ\text{C}$.

OPA336-EP
SINGLE-SUPPLY MICRO-POWER CMOS OPERATIONAL AMPLIFIER
MicroAmplifier™ SERIES

SCES658–JUNE 2006

Electrical Characteristics (continued)

over recommended operating temperature range, $V_S = 2.3\text{ V to }5.5\text{ V}$, $T_A = 25^\circ\text{C}$, $V_S = 5\text{ V}$, $R_L = 25\text{ k}\Omega$ connected to $V_S/2$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output						
Voltage output swing from rail ⁽²⁾		$R_L = 100\text{ k}\Omega$, $A_{OL} \geq 70\text{ dB}$		3		mV
		$R_L = 25\text{ k}\Omega$, $A_{OL} \geq 90\text{ dB}$		20	100	
		$R_L = 5\text{ k}\Omega$, $A_{OL} \geq 90\text{ dB}$		70	500	
Overtemperature ⁽³⁾		$R_L = 25\text{ k}\Omega$, $A_{OL} \geq 82\text{ dB}$			100	mV
		$R_L = 5\text{ k}\Omega$, $A_{OL} \geq 89\text{ dB}$			500	
I_{SC}	Short-circuit current			± 5		mA
C_{LOAD}	Capacitive load drive ⁽⁴⁾					
Power Supply						
V_S	Specified voltage range		2.3		5.5	V
	Minimum operating voltage			2.1		V
I_Q	Quiescent current (per amplifier)	$I_O = 0$		23	35	μA
	Overtemperature ⁽³⁾				38	







(2) Output voltage swings are measured between the output and positive and negative power-supply rails.

(3) Limits apply over the specified temperature range, $T_A = -55^\circ\text{C}$ to 125°C .

(4) See Capacitive Load and Stability section







TYPICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$, $V_S = 5\text{ V}$, $R_L = 25\text{ k}\Omega$ connected to $V_S/2$ (unless otherwise noted)

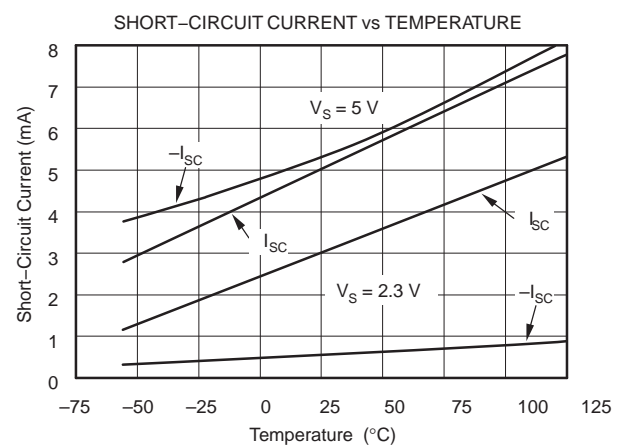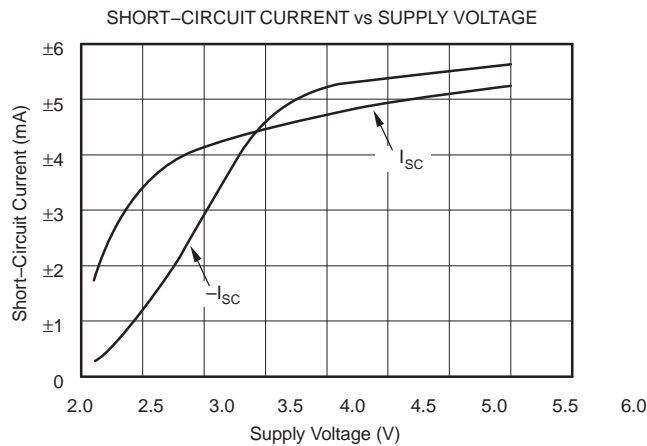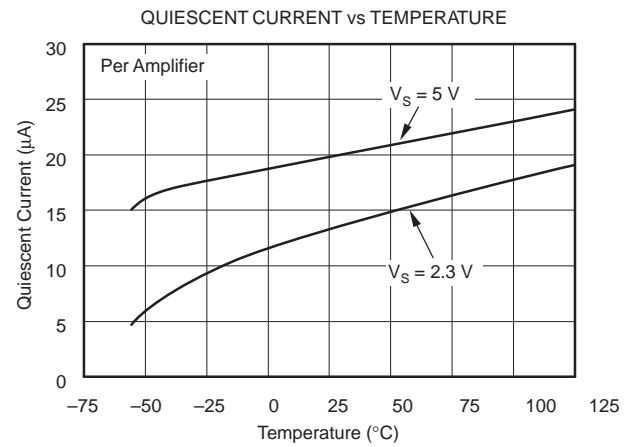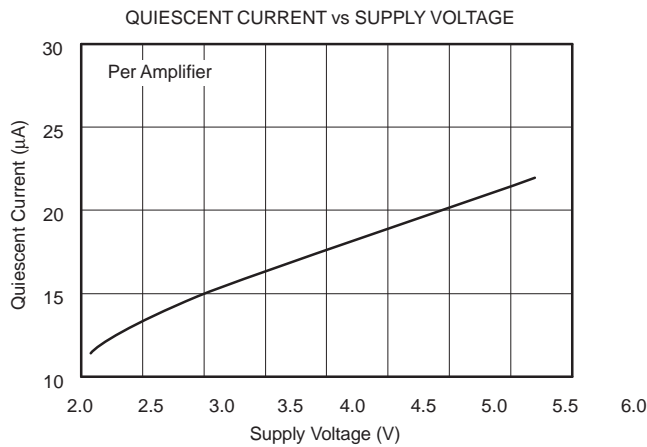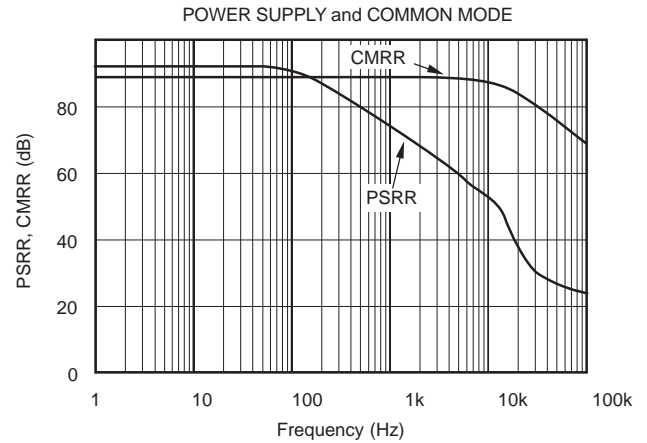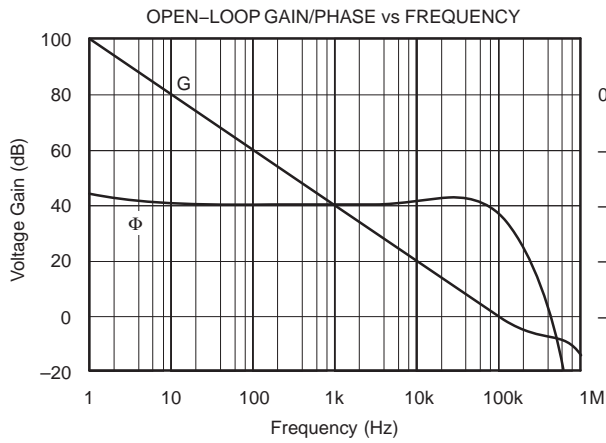







TYPICAL CHARACTERISTICS (continued)

$T_A = 25^\circ\text{C}$, $V_S = 5\text{ V}$, $R_L = 25\text{ k}\Omega$ connected to $V_S/2$ (unless otherwise noted)

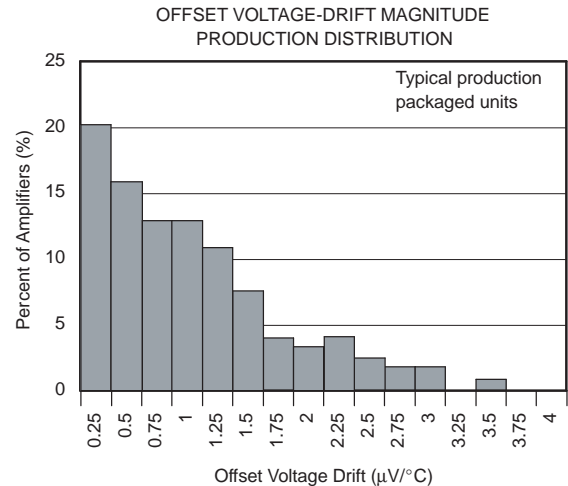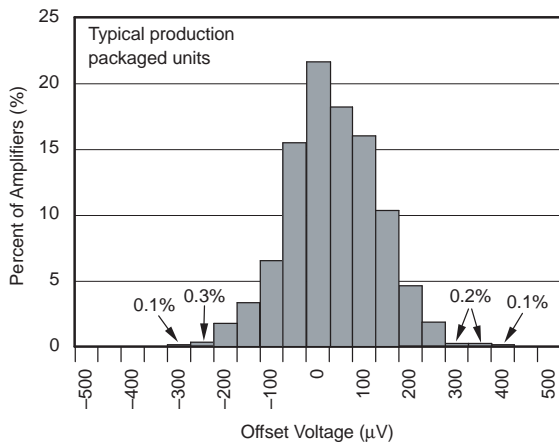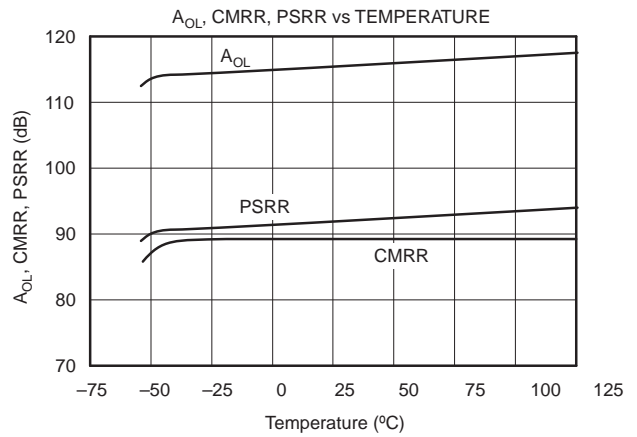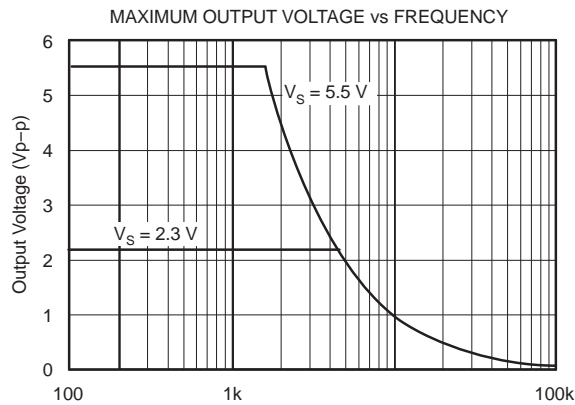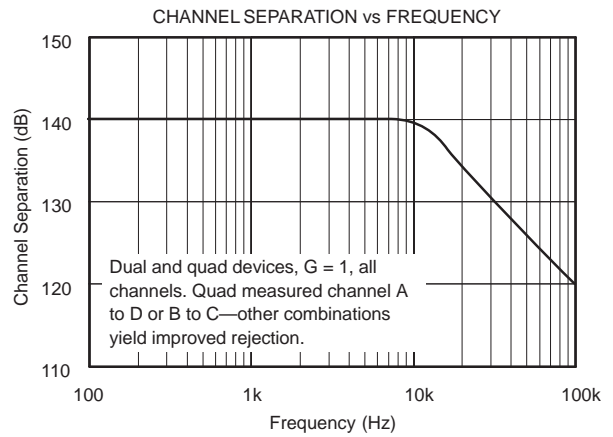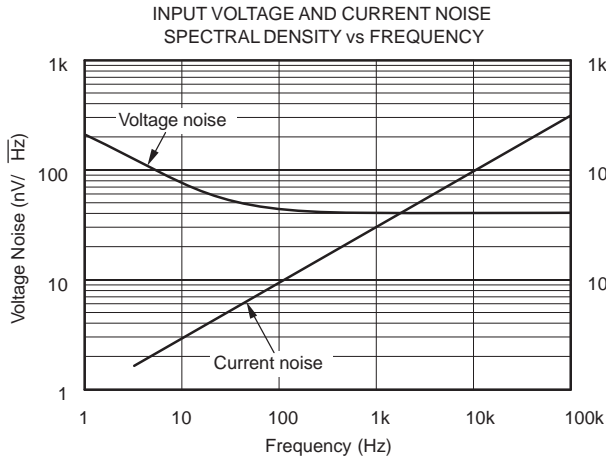

TYPICAL CHARACTERISTICS (continued)

$T_A = 25^\circ\text{C}$, $V_S = 5\text{ V}$, $R_L = 25\text{ k}\Omega$ connected to $V_S/2$ (unless otherwise noted)

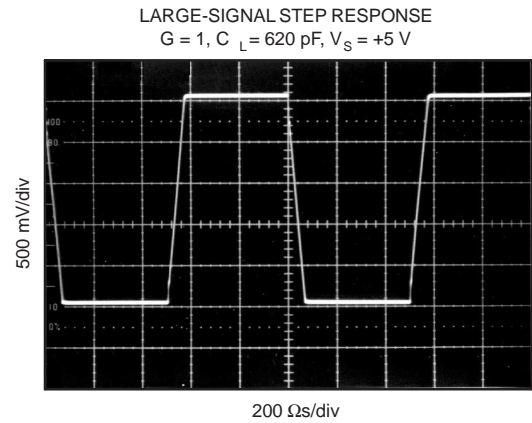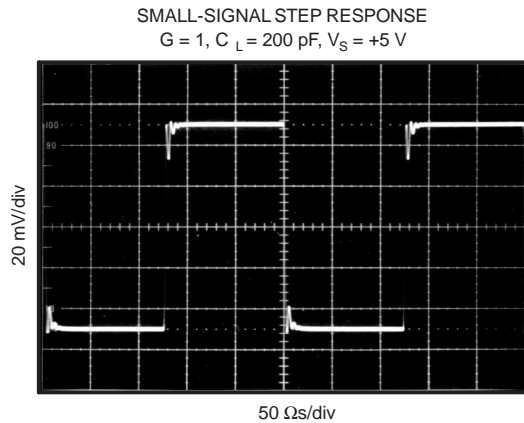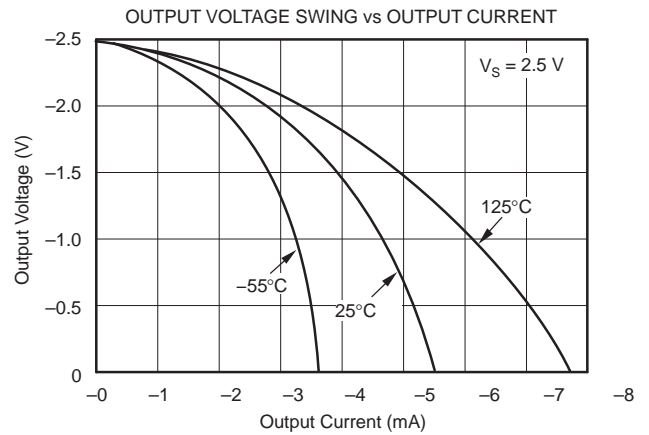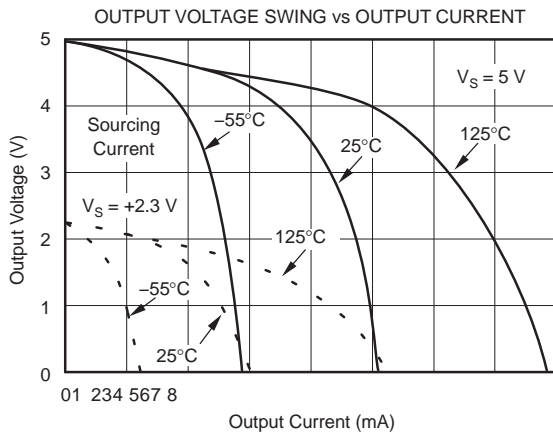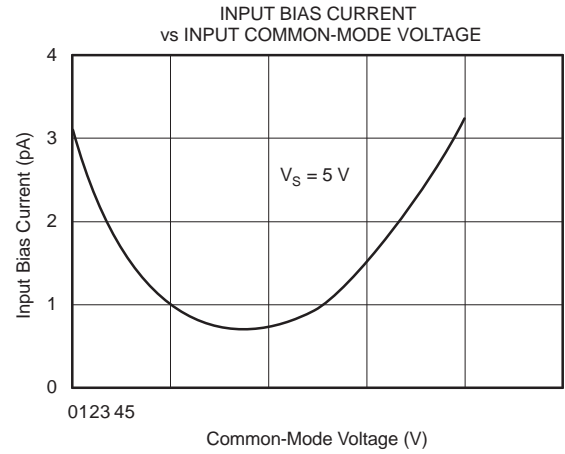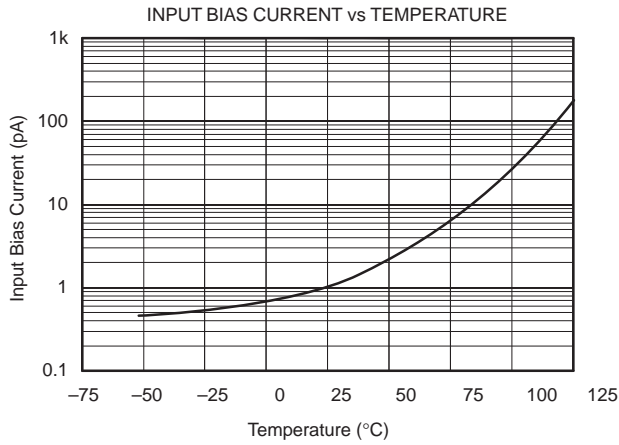

APPLICATION INFORMATION

The OPA336 operational amplifier is fabricated with a state-of-the-art 0.6-micron CMOS process. The device is unity-gain stable and suitable for a wide range of general-purpose applications. Power-supply pins should be bypassed with 0.01- μ F ceramic capacitors. The OPA336 is protected against reverse battery voltages.


Operating Voltage

The OPA336 can operate from a 2.1-V to 5.5-V single supply voltage, with excellent performance. Most behavior remains unchanged throughout the full operating voltage range. Parameters that vary significantly with operating voltage are shown in the typical characteristics. The OPA336 is fully specified for operation from 2.3 V to 5.5 V; a single limit applies over the supply range. In addition, many parameters are ensured over the specified temperature range, -55°C to 125°C .


Input Voltage

The input common-mode range of the OPA336 extends from $(V-) - 0.2\text{ V}$ to $(V+) - 1\text{ V}$. For normal operation, inputs should be limited to this range. The absolute maximum input voltage is 300 mV beyond the supplies. Thus, inputs greater than the input common-mode range, but less than maximum input voltage, while not valid, will not cause any damage to the operational amplifier. Furthermore, the inputs may go beyond the power supplies without phase inversion (see [Figure 1](#)), unlike some other operational amplifiers.

Normally, input bias current is approximately 1 pA. However, input voltages exceeding the power supplies can cause excessive current to flow in or out of the input pins. Momentary voltages greater than the power supply can be tolerated, as long as the current on the input pins is limited to 10 mA. This is easily accomplished with an input resistor (see [Figure 2](#)).

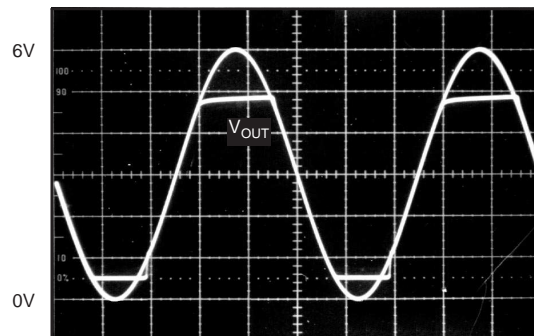

**Figure 1. No Phase Inversion
With Inputs Greater Than Power-Supply Voltage**

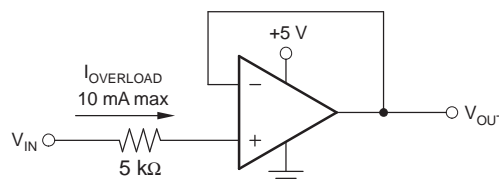

**Figure 2. Input Current Protection
for Voltages Exceeding Power-Supply Voltage**

APPLICATION INFORMATION (CONTINUED)

Capacitive Load and Stability

The OPA336 can drive a wide range of capacitive loads. However, all operational amplifiers, under certain conditions, may become unstable. Operational amplifier configuration, gain, and load value are just a few of the factors to consider when determining stability.

When properly configured, the OPA336 drives approximately 10,000 pF. An operational amplifier in unity-gain configuration is the most vulnerable to capacitive load. The capacitive load reacts with the operational amplifier output resistance along with any additional load resistance to create a pole in the response, which degrades the phase margin. In unity gain, the OPA336 performs well with a pure capacitive load, up to about 300 pF. Increasing gain enhances the amplifier's ability to drive loads beyond this level.

One method of improving capacitive load drive in the unity-gain configuration is to insert a 50-Ω to 100-Ω resistor inside the feedback loop (see [Figure 3](#)). This reduces ringing with large capacitive loads, while maintaining direct current (DC) accuracy. For example, with $R_L = 25\text{ k}\Omega$, OPA336 performs well with capacitive loads in excess of 1000 pF (see [Figure 4](#)). Without the OPA336 R_S , capacitive load drive typically is 350 pF for these conditions (see [Figure 5](#)).

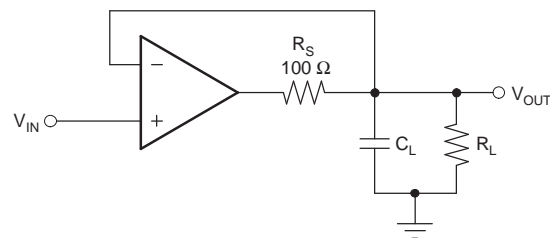


Figure 3. Series Resistor in Unity-Gain Configuration Improves Capacitive Load Drive

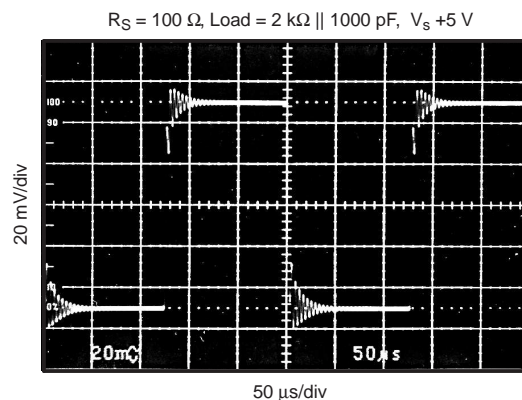


Figure 4. Small-Signal Step Response Using Series Resistor to Improve Capacitive Load Drive

APPLICATION INFORMATION (CONTINUED)

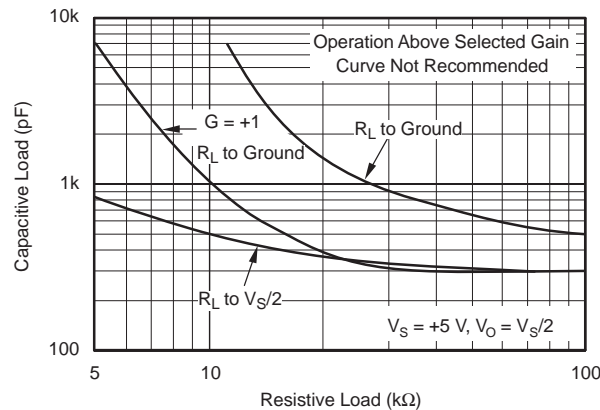


Figure 5. Stability — Capacitive Load vs Resistive Load

Alternatively, the resistor may be connected in series with the output outside of the feedback loop. However, if there is a resistive load parallel to the capacitive load, it and the series resistor create a voltage divider. This introduces a DC error at the output; however, this error may be insignificant. For instance, with $R_L = 100\text{ k}\Omega$ and $R_S = 100\ \Omega$, there is only about a 0.1% error at the output.

Figure 5 shows the recommended operating regions for the OPA336. Decreasing the load resistance generally improves capacitive load drive. Figure 5 also shows how stability differs, depending on where the resistive load is connected. With $G = 1$ and $R_L = 10\text{ k}\Omega$ connected to $V_S/2$, the OPA336 typically can drive 500 pF. Connecting the same load to ground improves capacitive load drive to 1000 pF.

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
OPA336MDBVREP	ACTIVE	SOT-23	DBV	5	3000	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-55 to 125	OAYM	Samples
V62/06641-01XE	ACTIVE	SOT-23	DBV	5	3000	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-55 to 125	OAYM	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF OPA336-EP :

- Catalog: [OPA336](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION



QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
OPA336MDBVREP	SOT-23	DBV	5	3000	179.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
OPA336MDBVREP	SOT-23	DBV	5	3000	213.0	191.0	35.0

EXAMPLE BOARD LAYOUT

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR



LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X



SOLDER MASK DETAILS

4214839/F 06/2021

NOTES: (continued)

- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR



SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214839/F 06/2021

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2021, Texas Instruments Incorporated