SCBS158E - JANUARY 1991 - REVISED MAY 1997


- State-of-the-Art *EPIC-IIB™* BiCMOS Design **Significantly Reduces Power Dissipation**
- **ESD Protection Exceeds 2000 V Per** MIL-STD-883, Method 3015; Exceeds 200 V Using Machine Model (C = 200 pF, R = 0)
- Latch-Up Performance Exceeds 500 mA Per **JEDEC Standard JESD-17**
- Typical V<sub>OLP</sub> (Output Ground Bounce) < 1 V at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$
- **High-Impedance State During Power Up** and Power Down
- High-Drive Outputs (-32-mA I<sub>OH</sub>, 64-mA I<sub>OI</sub>)
- **Buffered Control Inputs to Reduce** dc Loading Effects
- **Package Options Include Plastic** Small-Outline (DW) and Shrink Small-Outline (DB) Packages, Ceramic Chip Carriers (FK) and Flatpacks (W), and Standard Plastic (NT) and Ceramic (JT) **DIPs**

## description


These 9-bit flip-flops feature 3-state outputs designed specifically for driving highly capacitive or relatively low-impedance loads. They are particularly suitable for implementing wider buffer registers, I/O ports, bidirectional bus drivers with parity, and working registers.

With the clock-enable (CLKEN) input low, the nine D-type edge-triggered flip-flops enter data on the low-to-high transitions of the clock. Taking CLKEN high disables the clock buffer, thus latching the outputs. Taking the clear (CLR) input low causes the nine Q outputs to go low, independently of the clock.

#### SN54ABT823 . . . JT OR W PACKAGE SN74ABT823 . . . DB. DW. OR NT PACKAGE (TOP VIEW)



#### SN54ABT823 . . . FK PACKAGE (TOP VIEW)



NC - No internal connection

A buffered output-enable (OE) input can be used to place the nine outputs in either a normal logic state (high or low logic level) or a high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and increased drive provide the capability to drive bus lines without need for interface or pullup components.

When  $V_{CC}$  is between 0 and 2.1 V, the device is in the high-impedance state during power up or power down. However, to ensure the high-impedance state above 2.1 V,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

The SN54ABT823 is characterized for operation over the full military temperature range of -55°C to 125°C. The SN74ABT823 is characterized for operation from -40°C to 85°C.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

EPIC-IIB is a trademark of Texas Instruments Incorporated




## SN54ABT823, SN74ABT823 9-BIT BUS-INTERFACE FLIP-FLOPS WITH 3-STATE OUTPUTS

SCBS158E - JANUARY 1991 - REVISED MAY 1997

## FUNCTION TABLE (each flip-flop)

	INPUTS												
OE	CLR	CLKEN	CLK	Q									
L	L	Х	Χ	Χ	L								
L	Н	L	$\uparrow$	Н	Н								
L	Н	L	$\uparrow$	L	L								
L	Н	Н	Χ	Χ	Q <sub>0</sub>								
Н	Χ	X	Χ	Χ	Z								


## logic symbol†

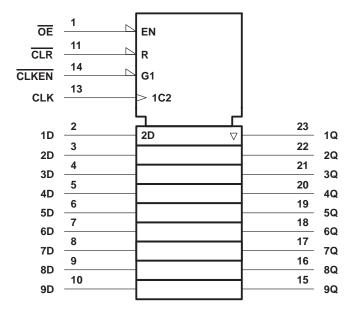

<sup>&</sup>lt;sup>†</sup> This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12. Pin numbers shown are for the DB, DW, JT, NT, and W packages.



## logic diagram (positive logic)

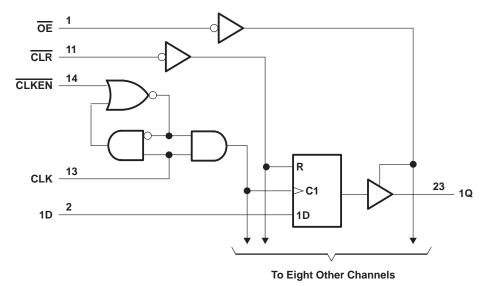

Pin numbers shown are for the DB, DW, JT, NT, and W packages.

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub> –(	0.5 V to 7 V
Input voltage range, V <sub>I</sub> (see Note 1)	0.5 V to 7 V
Voltage range applied to any output in the high or power-off state, V <sub>O</sub>	5 V to 5.5 V
Current into any output in the low state, IO: SN54ABT823	96 mA
SN74ABT823	128 mA
Input clamp current, $I_{IK}$ ( $V_I < 0$ )	–18 mA
Output clamp current, I <sub>OK</sub> (V <sub>O</sub> < 0)	–50 mA
Package thermal impedance, θ <sub>JA</sub> (see Note 2): DB package	104°C/W
DW package	81°C/W
NT package	67°C/W
Storage temperature range, T <sub>stq</sub> 65°	°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. This is a stress rating only, and functional operation of the device at these or any other conditions beyond those indicated in the "recommended operating conditions" section of this specification is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
  - 2. The package thermal impedance is calculated in accordance with EIA/JEDEC Std JESD51, except for through-hole packages, which use a trace length of zero.



## SN54ABT823, SN74ABT823 9-BIT BUS-INTERFACE FLIP-FLOPS WITH 3-STATE OUTPUTS

SCBS158E - JANUARY 1991 - REVISED MAY 1997

## recommended operating conditions (see Note 3)

		SN54A	BT823	SN74A	BT823	UNIT
		MIN	MAX	MIN	MAX	UNIT
Vcc	Supply voltage	4.5	5.5	4.5	5.5	V
V <sub>IH</sub>	High-level input voltage	2		2		V
V <sub>IL</sub>	Low-level input voltage		0.8		0.8	V
VI	Input voltage	0	VCC	0	VCC	V
loн	High-level output current		-24		-32	mA
loL	Low-level output current		48		64	mA
Δt/Δν	Input transition rise or fall rate		5		5	ns/V
Δt/ΔV <sub>CC</sub>	Power-up ramp rate	200		200		μs/V
TA	Operating free-air temperature	-55	125	-40	85	°C

NOTE 3: Unused inputs must be held high or low to prevent them from floating.

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST COM	DITIONS	Т	A = 25°C	;	SN54A	BT823	SN74A	BT823	UNIT
PARAMETER	TEST CONI	DITIONS	MIN	TYP†	MAX	MIN	MAX	MIN	MAX	UNII
VIK	V <sub>CC</sub> = 4.5 V,	I <sub>I</sub> = -18 mA			-1.2		-1.2		-1.2	V
	V <sub>CC</sub> = 4.5 V,	$I_{OH} = -3 \text{ mA}$	2.5			2.5		2.5		
\/	V <sub>CC</sub> = 5 V,	$I_{OH} = -3 \text{ mA}$	3			3		3		V
Voн	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	$I_{OH} = -24 \text{ mA}$	2			2				V
	V <sub>CC</sub> = 4.5 V	$I_{OH} = -32 \text{ mA}$	2*					2		
\/a.	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	I <sub>OL</sub> = 48 mA			0.55		0.55			V
VOL	V <sub>CC</sub> = 4.5 V	I <sub>OL</sub> = 64 mA			0.55*				0.55	V
V <sub>hys</sub>				100						mV
lį	V <sub>CC</sub> = 5.5 V,	V <sub>I</sub> = V <sub>CC</sub> or GND			±1		±1		±1	μΑ
lozpu <sup>‡</sup>	$V_{CC} = 0$ to 2.1 V, $V_{O} = 0.5$	5 V to 2.7 V, OE = X			±50		±50		±50	μΑ
lozpd <sup>‡</sup>	$V_{CC} = 2.1 \text{ V to } 0, V_{O} = 0.5$	5 V to 2.7 V, OE = X			±50		±50		±50	μΑ
lozh	V <sub>CC</sub> = 2.1 V to 5.5 V, V <sub>O</sub> =	= 2.7 V, <del>OE</del> ≥ 2 V			10§		10§		10§	μΑ
lozL	$V_{CC} = 2.1 \text{ V to } 5.5 \text{ V, V}_{O} =$	= 0.5 V, <del>OE</del> ≥ 2 V			-10§		-10§		-10§	μΑ
l <sub>off</sub>	$V_{CC} = 0$ ,	$V_I$ or $V_O \le 4.5 \text{ V}$			±100				±100	μΑ
ICEX	$V_{CC} = 5.5 \text{ V}, V_{O} = 5.5 \text{ V}$	Outputs high			50		50		50	μΑ
IO¶	V <sub>CC</sub> = 5.5 V,	V <sub>O</sub> = 2.5 V	-50	-140	-180	-50	-180	-50	-180	mA
	V 55VI 0	Outputs high		1	250		250		250	μΑ
ICC	$V_{CC} = 5.5 \text{ V}, I_{O} = 0,$ $V_{I} = V_{CC} \text{ or GND}$	Outputs low		24	38		38		38	mA
	11 - 100 01 0110	Outputs disabled		0.5	250		250		250	μΑ
ΔlCC <sup>#</sup>	$V_{CC}$ = 5.5 V, One input at Other inputs at $V_{CC}$ or GN				1.5		1.5		1.5	mA
C <sub>i</sub>	V <sub>I</sub> = 2.5 V or 0.5 V	<sub>I</sub> = 2.5 V or 0.5 V								pF
Co	V <sub>O</sub> = 2.5 V or 0.5 V			7						pF

<sup>\*</sup> On products compliant to MIL-PRF-38535, this parameter does not apply.

<sup>#</sup>This is the increase in supply current for each input that is at the specified TTL voltage level rather than V<sub>CC</sub> or GND.



<sup>&</sup>lt;sup>†</sup> All typical values are at  $V_{CC} = 5 \text{ V}$ .

<sup>&</sup>lt;sup>‡</sup> This parameter is characterized, but not production tested.

<sup>§</sup> This data sheet limit may vary among suppliers.

<sup>¶</sup> Not more than one output should be tested at a time, and the duration of the test should not exceed one second.

SCBS158E - JANUARY 1991 - REVISED MAY 1997

# timing requirements over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 1)

			V <sub>CC</sub> =	= 5 V, 25°C	SN54A	BT823	SN74A	UNIT	
			MIN	MAX	MIN	MAX	MIN	MAX	
fclock	Clock frequency		0	125	0	125	0	125	MHz
		CLR low	5.5		5.5		5.5		
t <sub>W</sub>	Pulse duration	CLK high	2.9		2.9		2.9		ns
		CLK low	3.8		3.8		3.8		
		CLR inactive	2.5		2.5		2.5		
١.	Setup time before CLK↑	Data	2.1		2.1		2.1		ns
t <sub>su</sub>		CLKEN high	2		2		2		
		CLKEN low	3.3		3.3		3.3		
		Data	1.3		1.3		1.3		
t <sub>h</sub>	Hold time after CLK↑	CLKEN high	1		1		1		ns
		CLKEN low	2		2		2		


## switching characteristics over recommended ranges of supply voltage and operating free-air temperature, $C_L$ = 50 pF (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>CC</sub> = 5 V, T <sub>A</sub> = 25°C			SN54A	BT823	SN74A	UNIT	
	(INFOT)		MIN	TYP	MAX	MIN	MAX	MIN	MAX	
f <sub>max</sub>			125	200		125		125		MHz
t <sub>PLH</sub>	CLK	Q	2.1	4.3	5.9	2.1	8.1	2.1	6.8	ns
<sup>t</sup> PHL	CLK	Q	2.2	4.4	6.1	2.2	7	2.2	6.7	113
t <sub>PHL</sub>	CLR	Q	2	4.1	6.3	2	7.3	2	7.1	ns
<sup>t</sup> PZH	ŌĒ	Q	1	3	4.7†	1	6.3	1	6†	no
tPZL	OE	ά	2.2	4.1	5.6	2.2	6.6	2.2	6.5	ns
t <sub>PHZ</sub>	ŌĒ	0	2.7	4.8	6.5†	2.7	7.7	2.7	7.5†	ns
t <sub>PLZ</sub>	OE .	Q	1.9	5	6.4	1.9	7.4	1.9	6.9	115

<sup>†</sup>This data sheet limit may vary among suppliers.

SCBS158E - JANUARY 1991 - REVISED MAY 1997

#### PARAMETER MEASUREMENT INFORMATION

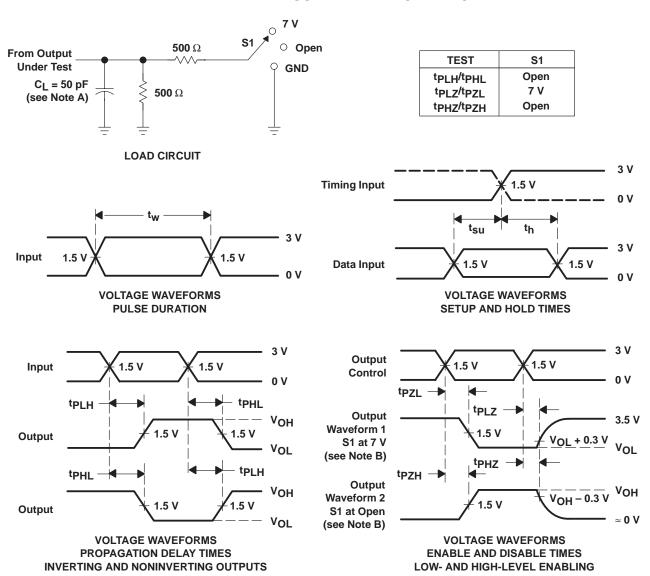

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \Omega$ ,  $t_f \leq$  2.5 ns,  $t_f \leq$  2.5 ns.
- D. The outputs are measured one at a time with one transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms



www.ti.com 14-Oct-2022

#### PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
5962-9450801Q3A	ACTIVE	LCCC	FK	28	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962- 9450801Q3A SNJ54 ABT823FK	Samples
SN74ABT823DBR	ACTIVE	SSOP	DB	24	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AB823	Samples
SN74ABT823DW	ACTIVE	SOIC	DW	24	25	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ABT823	Samples
SN74ABT823DWR	ACTIVE	SOIC	DW	24	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ABT823	Samples
SNJ54ABT823FK	ACTIVE	LCCC	FK	28	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962- 9450801Q3A SNJ54 ABT823FK	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

## **PACKAGE OPTION ADDENDUM**

www.ti.com 14-Oct-2022

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF SN54ABT823, SN74ABT823:

Catalog: SN74ABT823

Military: SN54ABT823

NOTE: Qualified Version Definitions:

- Catalog TI's standard catalog product
- Military QML certified for Military and Defense Applications

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 3-Jun-2022

## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ABT823DBR	SSOP	DB	24	2000	330.0	16.4	8.2	8.8	2.5	12.0	16.0	Q1
SN74ABT823DWR	SOIC	DW	24	2000	330.0	24.4	10.75	15.7	2.7	12.0	24.0	Q1

**PACKAGE MATERIALS INFORMATION** 

www.ti.com 3-Jun-2022




#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ABT823DBR	SSOP	DB	24	2000	356.0	356.0	35.0
SN74ABT823DWR	SOIC	DW	24	2000	350.0	350.0	43.0

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 3-Jun-2022

## **TUBE**

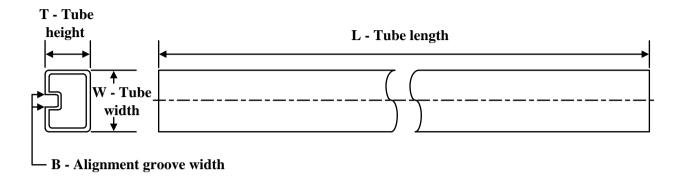

#### \*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
SN74ABT823DW	DW	SOIC	24	25	506.98	12.7	4826	6.6

DW (R-PDSO-G24)

## PLASTIC SMALL OUTLINE



NOTES: A. All linear dimensions are in inches (millimeters). Dimensioning and tolerancing per ASME Y14.5M-1994.

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
- D. Falls within JEDEC MS-013 variation AD.



DW (R-PDSO-G24)

PLASTIC SMALL OUTLINE



NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Refer to IPC7351 for alternate board design.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.



## DB (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE

#### **28 PINS SHOWN**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.

D. Falls within JEDEC MO-150

## FK (S-CQCC-N\*\*)

## LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN



NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a metal lid.
- D. Falls within JEDEC MS-004



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2022, Texas Instruments Incorporated