

### SN54ABT573, SN74ABT573A OCTAL TRANSPARENT D-TYPE LATCHES WITH 3-STATE OUTPUTS


SCBS190F - JANUARY 1991 - REVISED SEPTEMBER 2003

- Typical V<sub>OLP</sub> (Output Ground Bounce)
   1 V at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C
- High-Drive Outputs (–32-mA I<sub>OH</sub>, 64-mA I<sub>OL</sub>)
- I<sub>off</sub> Supports Partial-Power-Down Mode Operation
- Latch-Up Performance Exceeds 500 mA Per JEDEC Standard JESD 17
- ESD Protection Exceeds JESD 22
  - 2000-V Human-Body Model (A114-A)
  - 200-V Machine Model (A115-A)

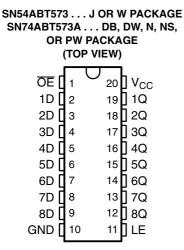

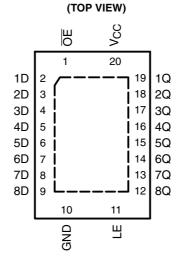

SN74ABT573A . . . RGY PACKAGE



SN54ABT573...FK PACKAGE

#### description/ordering information

These 8-bit latches feature 3-state outputs designed specifically for driving highly capacitive or relatively low-impedance loads. They are particularly suitable for implementing buffer registers, I/O ports, bidirectional bus drivers, and working registers.


#### **ORDERING INFORMATION**

T <sub>A</sub>	PACKAGE	†	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	PDIP – N	Tube	SN74ABT573AN	SN74ABT573AN
4000 1 0500	QFN – RGY	Tape and reel	SN74ABT573ARGYR	AB573A
	0010 PW	Tube	SN74ABT573ADW	ADT570A
	SOIC - DW	Tape and reel	SN74ABT573ADWR	ABT573A
	SOP - NS	Tape and reel	SN74ABT573ANSR	ABT573A
–40°C to 85°C	SSOP – DB	Tape and reel	SN74ABT573ADBR	AB573A
	TOOOD DW	Tube	SN74ABT573APW	AD570A
	TSSOP – PW	Tape and reel	SN74ABT573APWR	AB573A
	VFBGA – GQN	Towns and west	SN74ABT573AGQNR	AD570A
	VFBGA – ZQN (Pb-free)	Tape and reel	SN74ABT573AZQNR	AB573A
	CDIP – J	Tube	SNJ54ABT573J	SNJ54ABT573J
–55°C to 125°C	CFP – W	Tube	SNJ54ABT573W	SNJ54ABT573W
	LCCC – FK	Tube	SNJ54ABT573FK	SNJ54ABT573FK

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



SCBS190F - JANUARY 1991 - REVISED SEPTEMBER 2003

#### description/ordering information (continued)

A buffered output-enable ( $\overline{OE}$ ) input can be used to place the eight outputs in either a normal logic state (high or low logic levels) or the high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and increased drive provide the capability to drive bus lines without need for interface or pullup components.

OE does not affect the internal operations of the latches. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

This device is fully specified for partial-power-down applications using I<sub>off</sub>. The I<sub>off</sub> circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

# SN74ABT573A . . . GQN OR ZQN PACKAGE (TOP VIEW)

		1	2	3	4	_
Α		$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$	
В		$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$	
С		$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$	
D		$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$	
Ε		$\bigcirc$	$\bigcirc$	$\bigcirc$	$\bigcirc$	
	┖					_


#### terminal assignments

	1	2	3	4
Α	1D	ŌĒ	$V_{CC}$	1Q
В	3D	3Q	2D	2Q
С	5D	4D	5Q	4Q
D	7D	7Q	6D	6Q
Е	GND	8D	LE	8Q

# FUNCTION TABLE (each latch)

	INPUTS		OUTPUT
OE	LE	D	Q
L	Н	Н	Н
L	Н	L	L
L	L	Χ	$Q_0$
Н	Х	Χ	Z

#### logic diagram (positive logic)

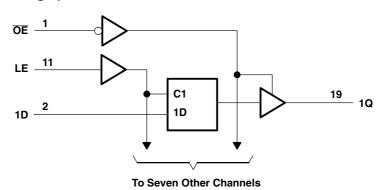

Pin numbers shown are for the DB, DW, FK, J, N, NS, PW, RGY, and W packages.



## SN54ABT573, SN74ABT573A OCTAL TRANSPARENT D-TYPE LATCHES WITH 3-STATE OUTPUTS

SCBS190F - JANUARY 1991 - REVISED SEPTEMBER 2003

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>	0.5 V to 7 V
Input voltage range, V <sub>I</sub> (see Note 1)	–0.5 V to 7 V
Voltage range applied to any output in the high or power-off state, V <sub>O</sub>	
Current into any output in the low state, I <sub>O</sub> : SN54ABT573	96 mA
SN74ABT573A	
Input clamp current, $I_{IK}$ ( $V_I < 0$ )	–18 mA
Output clamp current, I <sub>OK</sub> (V <sub>O</sub> < 0)	–50 mA
Package thermal impedance, θ <sub>JA</sub> (see Note 2): DB package	70°C/W
(see Note 2): DW package	58°C/W
(see Note 2): GQN/ZQN package	78°C/W
(see Note 2): N package	69°C/W
(see Note 2): NS package	60°C/W
(see Note 2): PW package	83°C/W
(see Note 3): RGY package	37°C/W
Storage temperature range, T <sub>stg</sub>	–65°C to 150°C

<sup>&</sup>lt;sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

- 2. The package thermal impedance is calculated in accordance with JESD 51-7.
- 3. The package thermal impedance is calculated in accordance with JESD 51-5.

#### recommended operating conditions (see Note 4)

			SN54A	BT573	SN74AB	T573A	LINIT
		MIN	MAX	MIN	MAX	UNIT	
V <sub>CC</sub>	Supply voltage	4.5	5.5	4.5	5.5	V	
V <sub>IH</sub>	High-level input voltage	2		2		V	
V <sub>IL</sub>	Low-level input voltage		0.8		0.8	V	
VI	Input voltage		0	$V_{CC}$	0	$V_{CC}$	V
I <sub>OH</sub>	High-level output current			-24		-32	mA
I <sub>OL</sub>	Low-level output current			48		64	mA
Δt/Δν	Input transition rise or fall rate	Outputs enabled		5		5	ns/V
T <sub>A</sub>	Operating free-air temperature	perating free-air temperature					

NOTE 4: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.



## SN54ABT573, SN74ABT573A OCTAL TRANSPARENT D-TYPE LATCHES WITH 3-STATE OUTPUTS

SCBS190F - JANUARY 1991 - REVISED SEPTEMBER 2003

# electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

	TEGT COMPLETIONS				<sub>A</sub> = 25°C	;	SN54A	BT573	SN74AB	T573A	LINUT
PARAMETER		TEST CONDITIO	NS	MIN	TYP†	MAX	MIN	MAX	MIN	MAX	UNIT
V <sub>IK</sub>	$V_{CC} = 4.5 \text{ V},$	I <sub>I</sub> = -18 mA				-1.2		-1.2		-1.2	V
	$V_{CC} = 4.5 \text{ V},$	$I_{OH} = -3 \text{ mA}$		2.5			2.5		2.5		
.,	$V_{CC} = 5 V$ ,	$I_{OH} = -3 \text{ mA}$		3			3		3		v
$V_{OH}$	V 45V	$I_{OH} = -24 \text{ mA}$					2				٧
	$V_{CC} = 4.5 \text{ V}$	$I_{OH} = -32 \text{ mA}$		2*					2		
.,	V 45V	$I_{OL} = 48 \text{ mA}$				0.55		0.55			٧
$V_{OL}$	$V_{CC} = 4.5 \text{ V}$	$I_{OL} = 64 \text{ mA}$				0.55*				0.55	V
$V_{hys}$				100						mV	
I <sub>I</sub>	$V_{CC} = 5.5 \text{ V},$	$V_I = V_{CC}$ or GNI			±1		±1		±1	μΑ	
l <sub>OZH</sub>	$V_{CC} = 5.5 \text{ V},$	$V_0 = 2.7 \text{ V}$			10 <sup>‡</sup>		10 <sup>‡</sup>		10 <sup>‡</sup>	μΑ	
I <sub>OZL</sub>	$V_{CC} = 5.5 \text{ V},$	$V_{O} = 0.5 \text{ V}$				-10 <sup>‡</sup>		-10 <sup>‡</sup>		-10 <sup>‡</sup>	μΑ
I <sub>off</sub>	V <sub>CC</sub> = 0,	$V_I$ or $V_O \le 4.5 \text{ V}$				±100				±100	μΑ
I <sub>CEX</sub>	$V_{CC} = 5.5 \text{ V},$	$V_{O} = 5.5 \text{ V}$	Outputs high			50		50		50	μΑ
I <sub>O</sub> §	$V_{CC} = 5.5 \text{ V},$	$V_0 = 2.5 \text{ V}$		-50	-100	-180	-50	-180	-50	-180	mA
	.,	•	Outputs high		1	250		250		250	μΑ
I <sub>CC</sub>	$V_{CC} = 5.5 \text{ V}, I_{C}$ $V_{I} = V_{CC} \text{ or GN}$		Outputs low		24	30		30		30	mA
	VI = VCC or Gr	,,,	Outputs disabled		0.5	250		250		250	μΑ
Δl <sub>CC</sub> ¶	$V_{CC}$ = 5.5 V, One input at 3.4 V, Other inputs at $V_{CC}$ or GND					1.5		1.5		1.5	mA
C <sub>i</sub>	$V_I = 2.5 \text{ V or } 0.$	5 V			3.5						pF
Co	$V_0 = 2.5 \text{ V or } 0$	).5 V			6.5						pF

<sup>\*</sup> On products compliant to MIL-PRF-38535, this parameter does not apply.

# timing requirements over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 1)

					MIN	MAX	UNIT	
			MIN MAX					
t <sub>w</sub>	Pulse duration, LE high		3.3		3.3		ns	
	Setup time, data before LE↓	High	1.9		2.5			
t <sub>su</sub>	Setup time, data before LEV	Low	1.5		2.5	ns		
t <sub>h</sub>	Hold time, data after LE↓		1		2.5		ns	



<sup>&</sup>lt;sup>†</sup> All typical values are at  $V_{CC} = 5 \text{ V}$ .

<sup>&</sup>lt;sup>‡</sup> This data sheet limit may vary among suppliers.

<sup>§</sup> Not more than one output should be tested at a time, and the duration of the test should not exceed one second.

This is the increase in supply current for each input that is at the specified TTL voltage level, rather than V<sub>CC</sub> or GND.

SCBS190F - JANUARY 1991 - REVISED SEPTEMBER 2003

# timing requirements over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see Figure 1)

				SN74A	3T573A		
					MAX	UNIT	
			MIN	MAX			
t <sub>w</sub>	Pulse duration, LE high		3.3		3.3		ns
	Cation times, data hafara I E	High	1.9		1.9		]
t <sub>su</sub>	Setup time, data before LE↓	Low	1.5		1.5	ns	
t <sub>h</sub>	Hold time, data after LE $\downarrow$		1.8 <sup>†</sup>		1.8 <sup>†</sup>		ns

<sup>†</sup> This data-sheet limit may vary among suppliers.

# switching characteristics over recommended ranges of supply voltage and operating free-air temperature, $C_L = 50$ pF (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)		<sub>CC</sub> = 5 V <sub>A</sub> = 25°C		MIN	MAX	UNIT
			MIN	TYP	MAX			
t <sub>PLH</sub>	D	0	1.9	3.2	5.4	1.4	6.4	
t <sub>PHL</sub>		Q	2.2	4.2	5.7	1.6	6.7	ns
t <sub>PLH</sub>		0	2.2	4	6.1	2	7.1	]
t <sub>PHL</sub>	LE	Q	3.2	5.2	6.7	2.8	7.5	ns
t <sub>PZH</sub>	<del>oe</del>	0	1.2	3.2	4.7	0.8	6.2	
t <sub>PZL</sub>	ŌĒ	Q	2.7	4.7	6.2	2	7.2	ns
t <sub>PHZ</sub>	<del>o-</del>	0	2.5	4.9	6.4	2.2	7.7	
t <sub>PLZ</sub>	ŌĒ	Q	2	4.2	6	1.4	7	ns

# switching characteristics over recommended ranges of supply voltage and operating free-air temperature, $C_L = 50$ pF (unless otherwise noted) (see Figure 1)


PARAMETER	FROM (INPUT)	TO (OUTPUT)	V <sub>0</sub>	<sub>CC</sub> = 5 V <sub>A</sub> = 25°C	,	MIN	MAX	UNIT
			MIN	TYP	MAX			
t <sub>PLH</sub>	_	•	1.9	3.2	5.4	1.9	5.9	
t <sub>PHL</sub>	D	Q	2.2	4.2	5.7	2.2	6.2	ns
t <sub>PLH</sub>		0	2.2	4	6.1	2.2	6.6	
t <sub>PHL</sub>	LE	Q	3.2	5.2	6.7	3.2	7.2	ns
t <sub>PZH</sub>	<del></del>	•	1.2	3.2	4.7	1.2	5.2	
t <sub>PZL</sub>	ŌĒ	Q	2.5†	4.7	6.2	2.5†	6.7	ns
t <sub>PHZ</sub>	OF.	0	2.5	4.9	6.4	2.5	7.1 <sup>†</sup>	200
t <sub>PLZ</sub>	ŌĒ	Q	2	4.2	6	2	6.5	ns

<sup>&</sup>lt;sup>†</sup> This data-sheet limit may vary among suppliers.



SCBS190F - JANUARY 1991 - REVISED SEPTEMBER 2003

#### PARAMETER MEASUREMENT INFORMATION

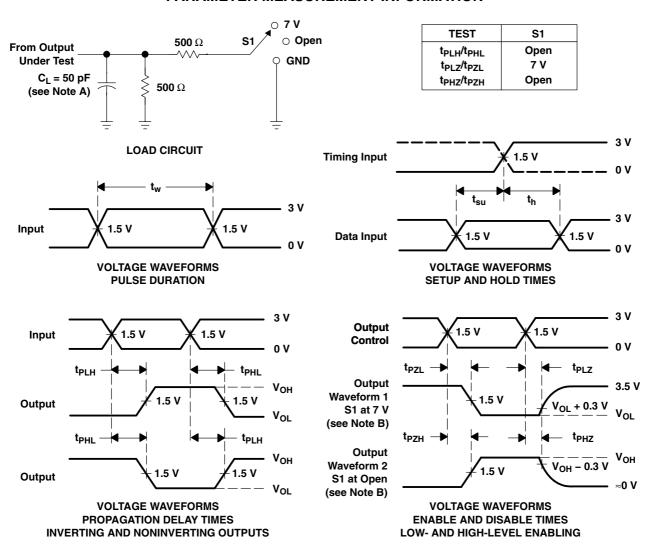

NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_{Q}$  = 50  $\Omega$ ,  $t_{r} \leq$  2.5 ns,  $t_{f} \leq$  2.5 ns.
- D. The outputs are measured one at a time with one transition per measurement.
- E. All parameters and waveforms are not applicable to all devices.

Figure 1. Load Circuit and Voltage Waveforms



www.ti.com

14-Oct-2022

#### **PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead finish/ Ball material	MSL Peak Temp	Op Temp (°C)	Device Marking (4/5)	Samples
5962-9321901Q2A	ACTIVE	LCCC	FK	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962- 9321901Q2A SNJ54ABT 573FK	Samples
5962-9321901QRA	ACTIVE	CDIP	J	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-9321901QR A SNJ54ABT573J	Samples
5962-9321901QSA	ACTIVE	CFP	W	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-9321901QS A SNJ54ABT573W	Samples
SN74ABT573ADBR	ACTIVE	SSOP	DB	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AB573A	Samples
SN74ABT573ADW	ACTIVE	SOIC	DW	20	25	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ABT573A	Samples
SN74ABT573ADWR	ACTIVE	SOIC	DW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	ABT573A	Samples
SN74ABT573AN	ACTIVE	PDIP	N	20	20	RoHS & Green	NIPDAU	N / A for Pkg Type	-40 to 85	SN74ABT573AN	Samples
SN74ABT573APW	ACTIVE	TSSOP	PW	20	70	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AB573A	Samples
SN74ABT573APWR	ACTIVE	TSSOP	PW	20	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AB573A	Samples
SN74ABT573ARGYR	ACTIVE	VQFN	RGY	20	3000	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	AB573A	Samples
SNJ54ABT573FK	ACTIVE	LCCC	FK	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962- 9321901Q2A SNJ54ABT 573FK	Samples
SNJ54ABT573J	ACTIVE	CDIP	J	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-9321901QR A SNJ54ABT573J	Samples
SNJ54ABT573W	ACTIVE	CFP	W	20	1	Non-RoHS & Green	SNPB	N / A for Pkg Type	-55 to 125	5962-9321901QS A SNJ54ABT573W	Samples

<sup>(1)</sup> The marketing status values are defined as follows: **ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.



### PACKAGE OPTION ADDENDUM

www.ti.com 14-Oct-2022

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

- (3) MSL, Peak Temp. The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead finish/Ball material Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## **PACKAGE MATERIALS INFORMATION**

www.ti.com 9-Aug-2022

#### TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ABT573ADBR	SSOP	DB	20	2000	330.0	16.4	8.2	7.5	2.5	12.0	16.0	Q1
SN74ABT573ADWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.3	2.7	12.0	24.0	Q1
SN74ABT573APWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.1	1.6	8.0	16.0	Q1
SN74ABT573ARGYR	VQFN	RGY	20	3000	330.0	12.4	3.8	4.8	1.6	8.0	12.0	Q1



www.ti.com 9-Aug-2022



#### \*All dimensions are nominal

7 til dillionorio dio mominal							
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ABT573ADBR	SSOP	DB	20	2000	356.0	356.0	35.0
SN74ABT573ADWR	SOIC	DW	20	2000	367.0	367.0	45.0
SN74ABT573APWR	TSSOP	PW	20	2000	356.0	356.0	35.0
SN74ABT573ARGYR	VQFN	RGY	20	3000	356.0	356.0	35.0

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 9-Aug-2022

#### **TUBE**



\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
5962-9321901Q2A	FK	LCCC	20	1	506.98	12.06	2030	NA
5962-9321901QSA	W	CFP	20	1	506.98	26.16	6220	NA
SN74ABT573ADW	DW	SOIC	20	25	507	12.83	5080	6.6
SN74ABT573AN	N	PDIP	20	20	506	13.97	11230	4.32
SN74ABT573APW	PW	TSSOP	20	70	530	10.2	3600	3.5
SNJ54ABT573FK	FK	LCCC	20	1	506.98	12.06	2030	NA
SNJ54ABT573W	W	CFP	20	1	506.98	26.16	6220	NA

# W (R-GDFP-F20)

## CERAMIC DUAL FLATPACK



- A. All linear dimensions are in inches (millimeters).
- This drawing is subject to change without notice.
- C. This package can be hermetically sealed with a ceramic lid using glass frit.

  D. Index point is provided on cap for terminal identification only.

  E. Falls within Mil—Std 1835 GDFP2—F20







- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



# PW (R-PDSO-G20)

# PLASTIC SMALL OUTLINE



- All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
  C. Publication IPC-7351 is recommended for alternate design.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.







- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-150.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



### 14 LEADS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. This package is hermetically sealed with a ceramic lid using glass frit.
- D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
- E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

3.5 x 4.5, 0.5 mm pitch

PLASTIC QUAD FGLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.





PLASTIC QUAD FLATPACK - NO LEAD



- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
  2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



8.89 x 8.89, 1.27 mm pitch

LEADLESS CERAMIC CHIP CARRIER

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.



# N (R-PDIP-T\*\*)

## PLASTIC DUAL-IN-LINE PACKAGE

16 PINS SHOWN



- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
- The 20 pin end lead shoulder width is a vendor option, either half or full width.





SOIC



- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm per side.
- 5. Reference JEDEC registration MS-013.



SOIC



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SOIC



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2023, Texas Instruments Incorporated